ELEVATION CERTIFICATE

O.M.B. No 3067-0077 Expires May 31, 1993

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME DAN MARKHAM	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg, Number) CR P.O. ROUTE AND BOX NUMBER	
1700 E STH N MTN. HOME TO 83647	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
CITY	
MTN. HOME IDAHO	83647
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMAT	ION
ravide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM ZO	NE 6. BASE FLOOD ELEVATION
160058 VI 00051 C - 10 0000415-001 00	I'm AO Zones, use depth)
Indicate the elevation datum system used on the FIRM for Base Flood Florestings (RES).	T.
2. To Zones A of V, where no BHE is provided on the FIRM, and the community has established a Ri) '29 Unother (describe on back)
the community's BFE: Lilling feet NGVD (or other FIRM datum-see Section B, Item 7),	g che, moreate
SECTION C BUILDING ELEVATION INFORMATION	
Using the Elevation Certificate Instructions, Indicate the diagram number from the diagrams found of describes the subject building's reference level (a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the se of Jeet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural mem the selected diagram, is at an elevation of Jeet NGVD (or other FIRM datum—see (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is Jeen one) the highest grade adjacent to the building. If no flood depth number is available, is the build level) elevated in accordance with the community's floodplain management ordinance? Yes Indicate the elevation datum system used in determining the above reference level elevations: number Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is of the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM equation under Comments on Page 2.) Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page 4)	lected diagram is at an elevation ber of the reference level from a Section B, Item 7). Light feet above or or let above or let above or let or let above or let above or let or let above
The reference level elevation is becaute V V (See instructions on Page 4)	
The reference level elevation is based on: \(\sum \) actual construction \(\sum \) construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference le case this certificate will only be valid for the building during the course of construction. A post-const will be required once construction is complete.)	ruction Elevation Certificate
The elevation of the lowest grade immediately adjacent to the building is: 2 AFWER THIN Section B, Item 7).	VD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
If the community official responsible for verifying building elevations specifies that the reference level is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation floor" as defined by the ordinance is:	on of the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-II the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Building Office	COMPANY NAME	Who	Yane	
ADDRESS SEST.	CITY		STATE	ŽIF
TOTAL P	1 -	DATE	PHONE	
opies should be made of this Certi	ificate for: 1) community official, 2) ins	urance agen		owner.
Copies should be made of this Certi	ificate for: 1) community official, 2) ins	urance agen		owner.
	ificate for: 1) community official, 2) ins	urance agen		owner.
	ificate for: 1) community official, 2) ins	urance agen		owner.
	ificate for: 1) community official, 2) ins	urance agen		owner.

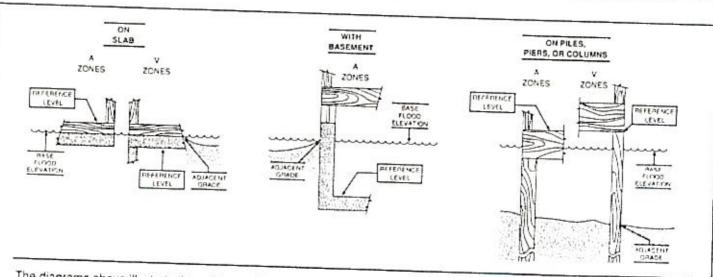

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.